2. Recessed installation

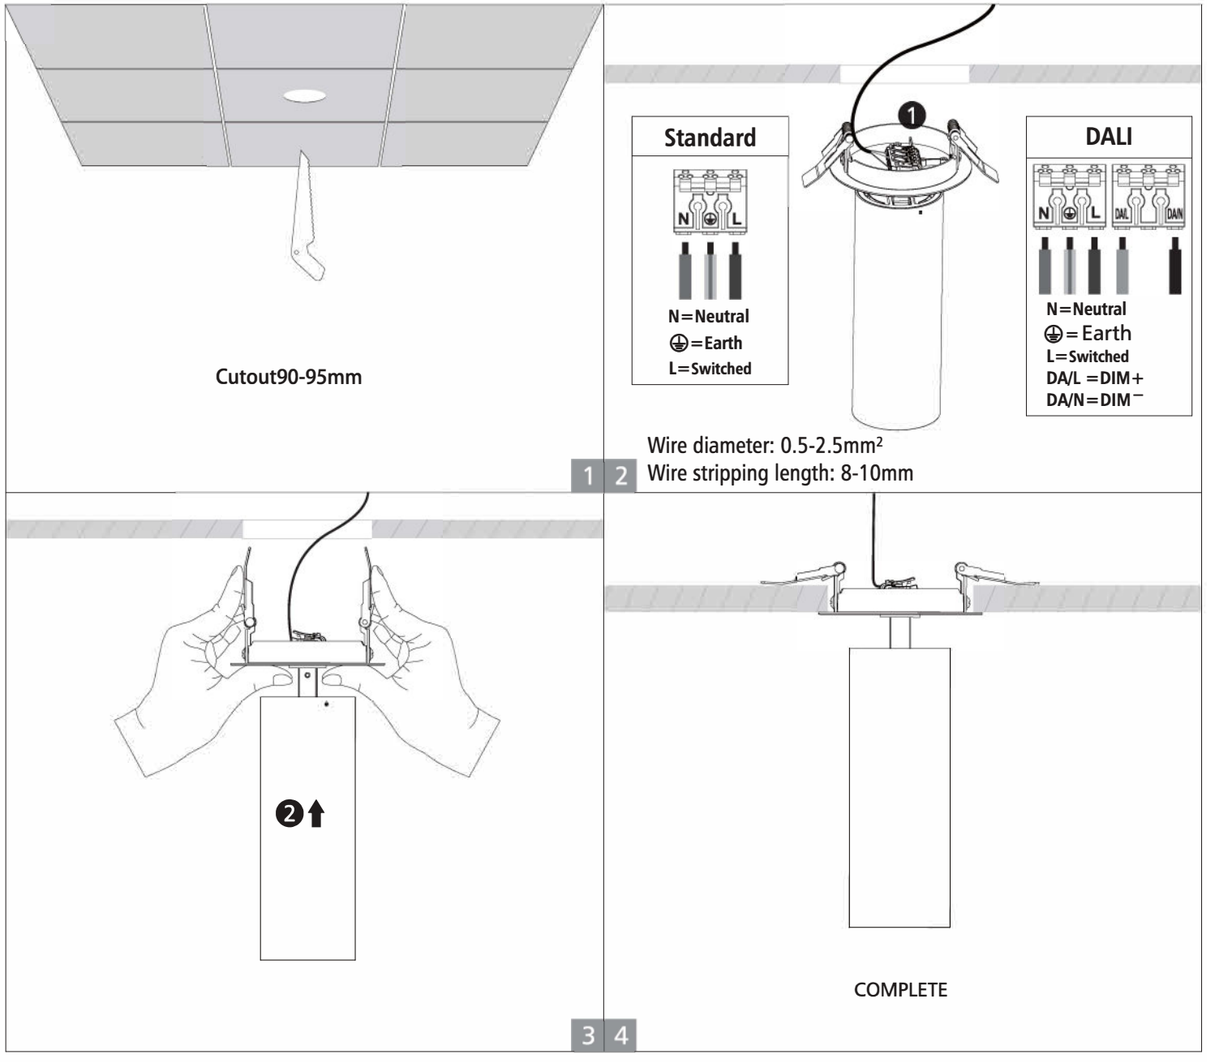

3. Surface mounted installation(With round ceiling plate)

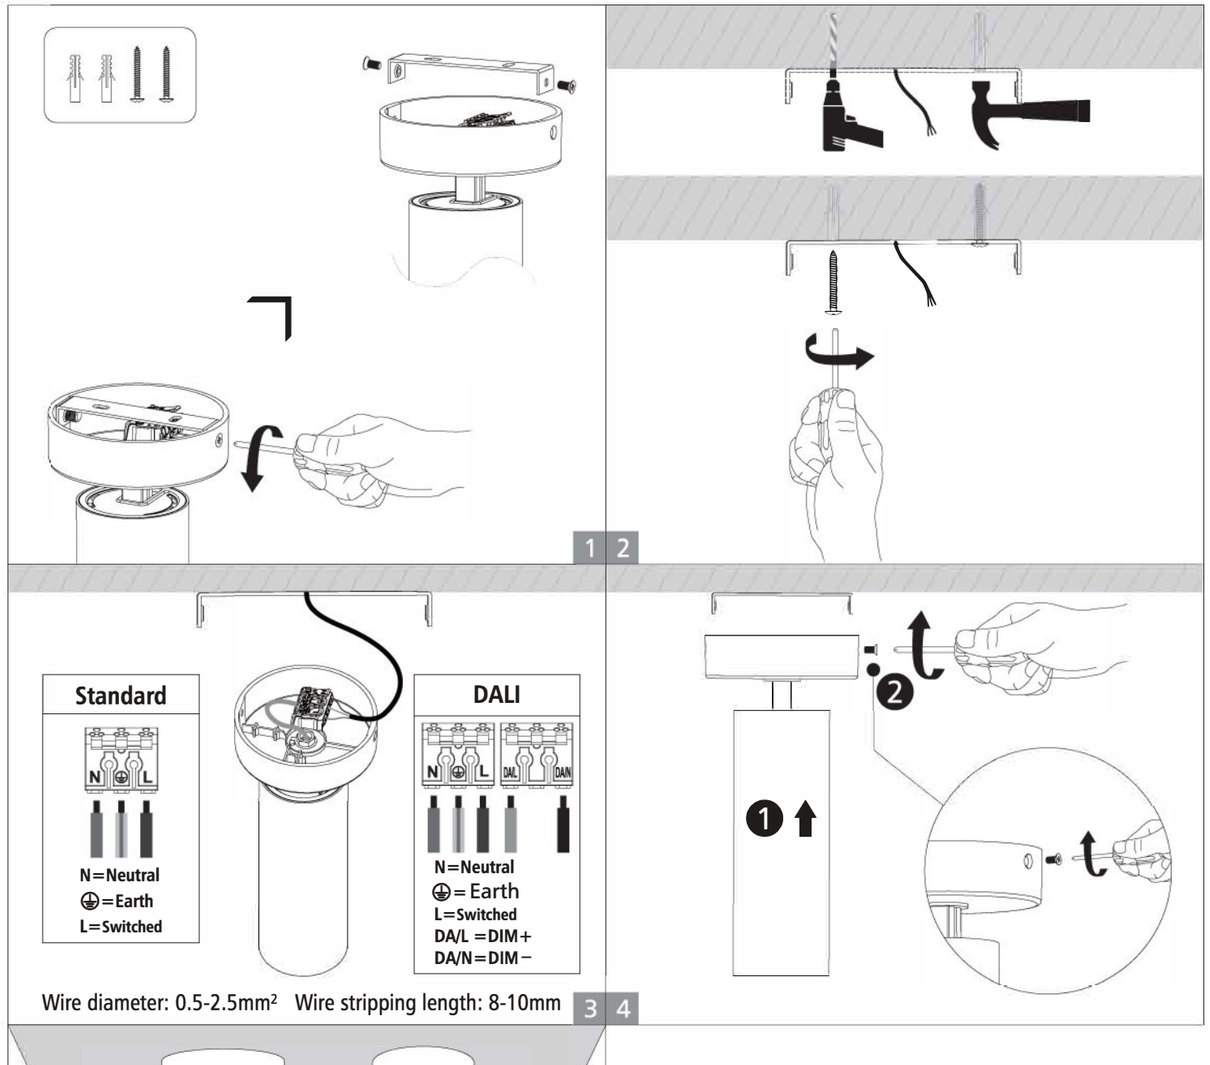

luminex

Lundagervej 25A • 8723 Løsning • 76 26 67 00 • www.luminex.dk

4. Track installation

Select corresponding adapter before installation



2-wires, 1-circuit



3-wires, 1-circuit



4-wires, 3-circuit



6-wires, 3-circuit (DALI)

Wiring Diagram (Please select according to the actual product)

2-wires, 1-circuit

1-phase, 1-circuit, 230V AC, 16A, 3.7kVA

3-wires, 1-circuit



1-phase, 1-circuit, 230V AC, 16A, 3.7kVA

4-wires, 3-circuit

A

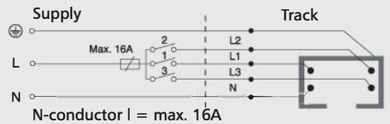

N-conductor I = max. 16A

1-phase, 3-circuit, 230V AC, 16A, 3.7kVA

B

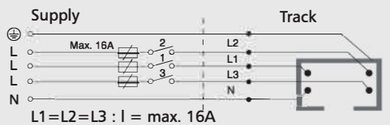

L1=L2=L3 : I = max. 16A

3-phase, 3-circuit, 230/400V AC, 16A, 3x3.7kVA

C

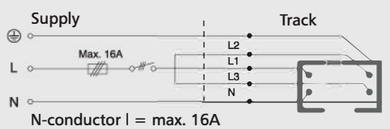

N-conductor I = max. 16A

3-phase, 3-circuit, 230/400V AC, 16A, 11.1kVA

6-wires, 3-circuit (DALI)

A

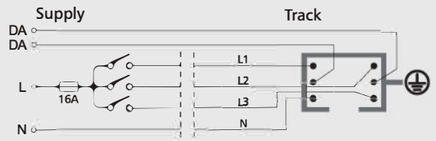

1-phase, 3-circuit, 230V AC, 16A max

B

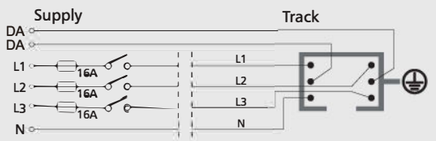

3-phase, 3-circuit, 230V AC, 16A max

C

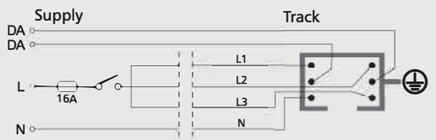

1-phase, 3-circuit, 230V AC, 16A max

4-wires, 3-circuit

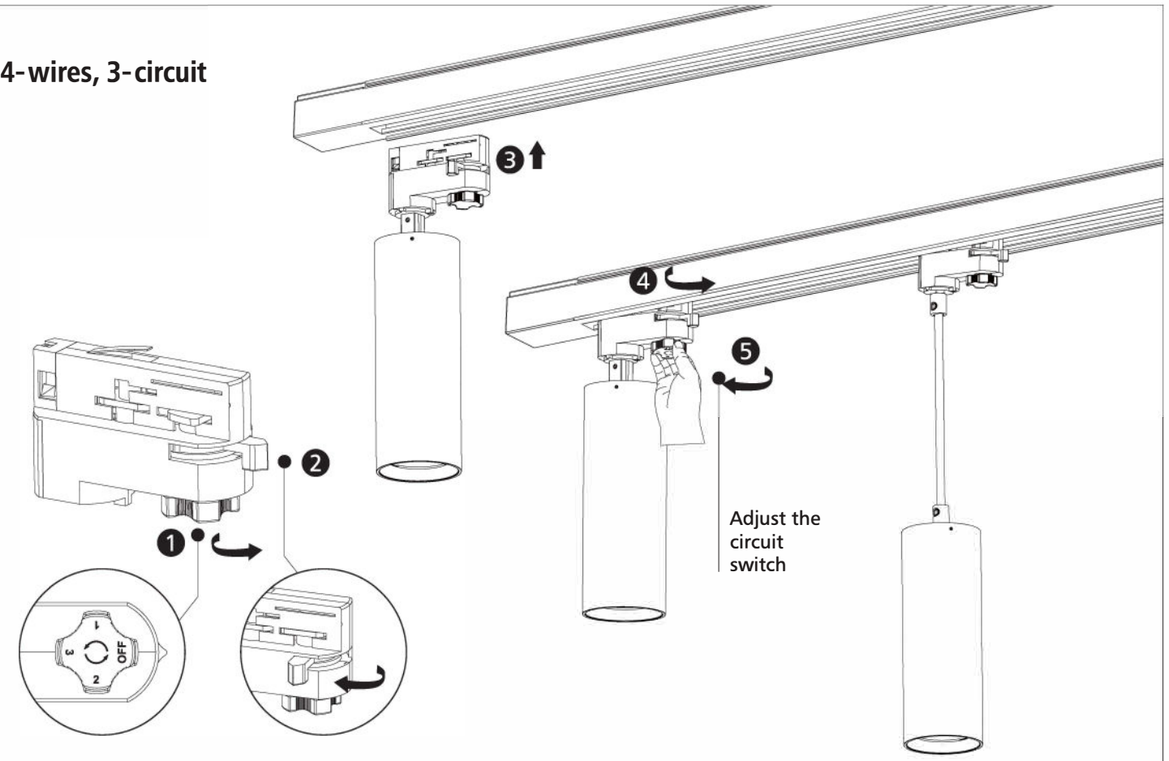

6-wires, 3-circuit (DALI)

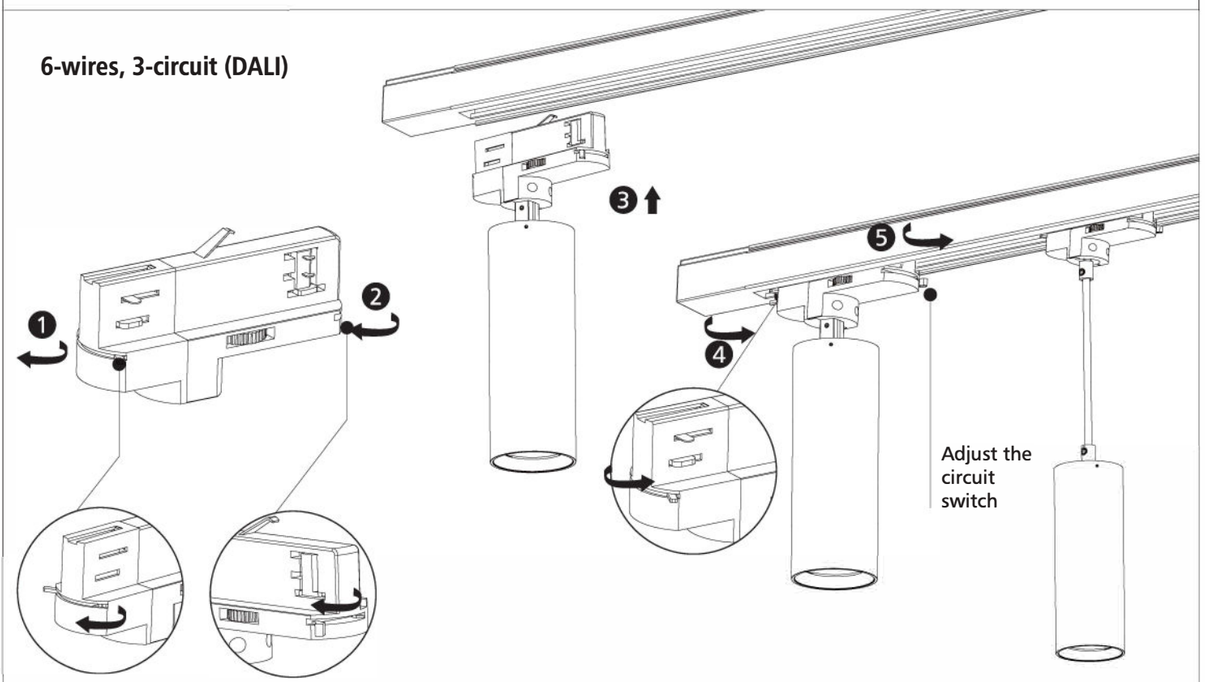

luminex

Lundagervej 25A • 8723 Løsning • 76 26 67 00 • www.luminex.dk

Installation for track

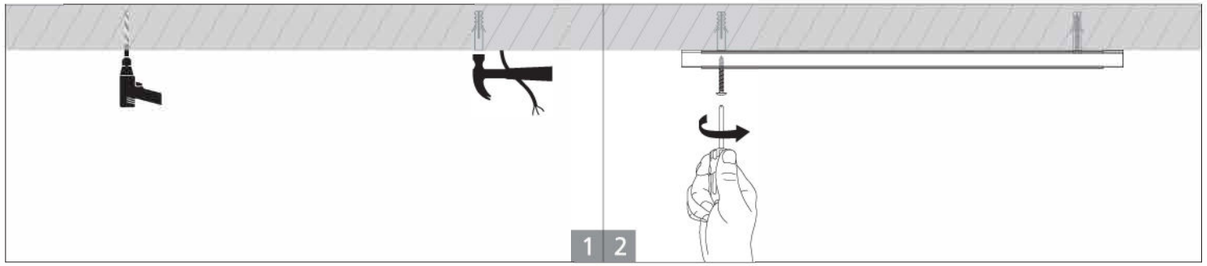



Straight "–"



Corner "L"



"T" shape



Cross "+"

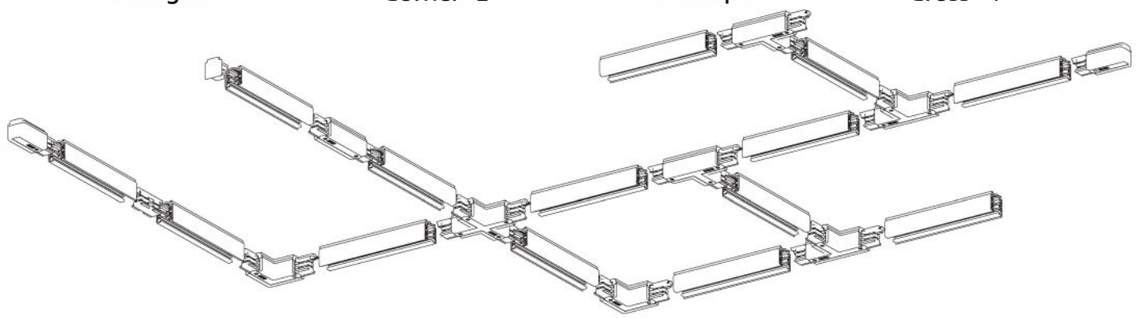

Note: Do not install in the place near heat source, or in corrosive gas environment.

5. Lamp DIY instruction

Exchangeable accessories

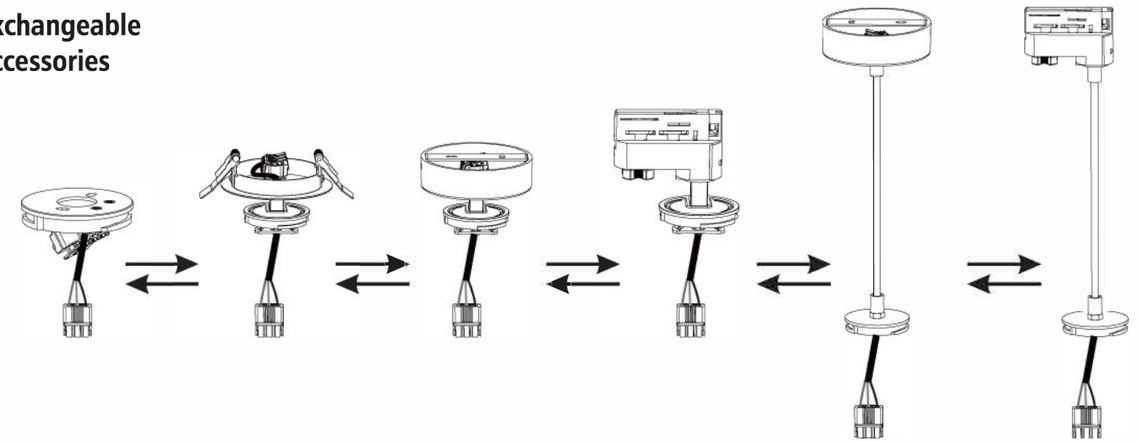

Disassembly reference

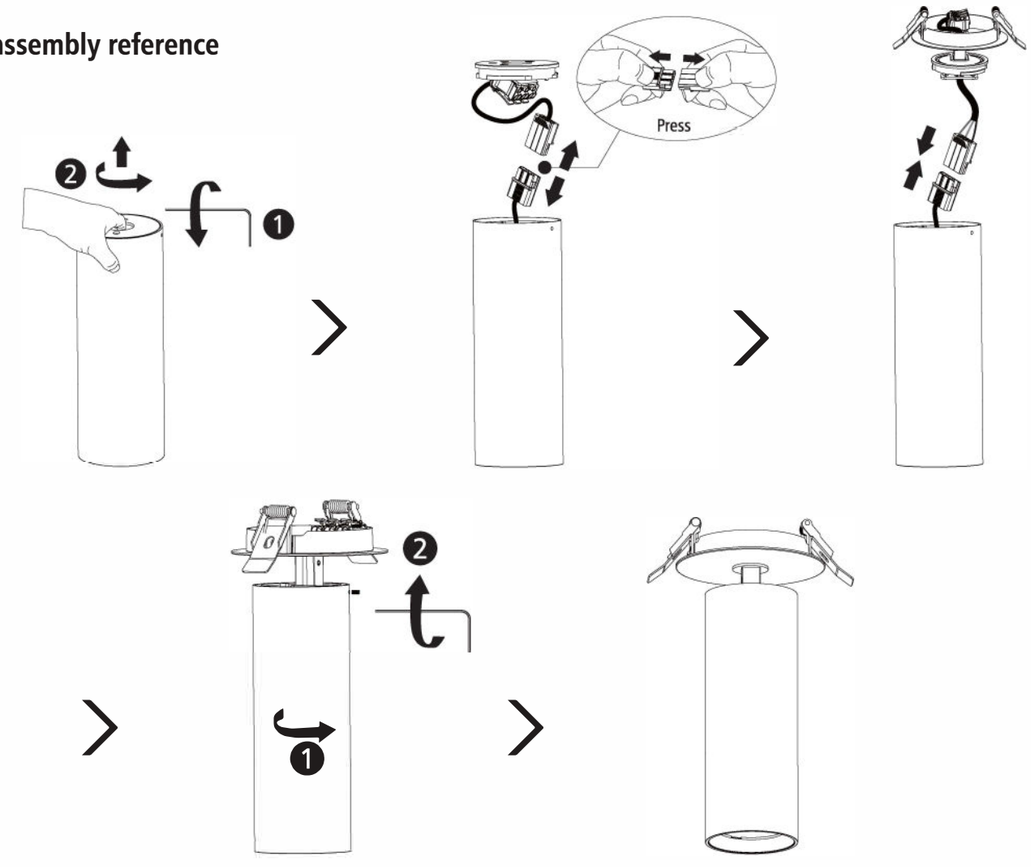

luminex

Lundagervej 25A • 8723 Løsning • 76 26 67 00 • www.luminex.dk

How to change the refector?

Disassemble

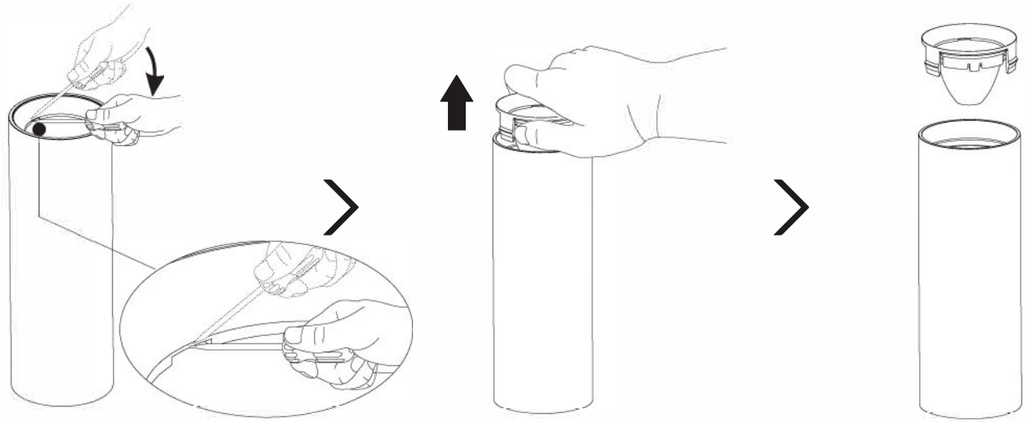

Assemble

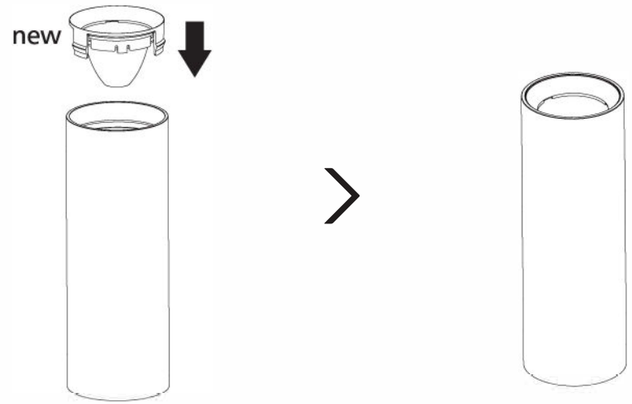

luminex

Lundagervej 25A • 8723 Løsning • 76 26 67 00 • www.luminex.dk